

BULLETIN # 11T-01

Carlyle OEM Compressor Sales PO Box 4808 Carrier Parkway, Bldg. TR4 Syracuse, NY 13221

SUBJECT: Required Operating Oil Level – 06E, 06CC Models

DATE: July 7th, 2011 AUTHOR: John Byrnes

	PRODUCT	SERVICE & PARTS	GENERAL
--	---------	-----------------	---------


Product Name: All 06E and some 06CC models (50 CFM and greater)

DESCRIPTION

Carlyle has become aware of a number of 06E and 06CC compressors applications applied with oil level controls that do not meet the requirements for all 06E models and some 06CC models (50 CFM and greater).

The correct operating oil level for Carlyle 06E and 06CC models (50 CFM and greater) is between 1/8th and 3/8th of the sight-glass. Any applied Oil Level control device must be able to control within these limits. Operating the subject compressors with oil levels outside of these limits may affect compressor reliability and could void the warranty.

RECOMMENDED OIL LEVELS

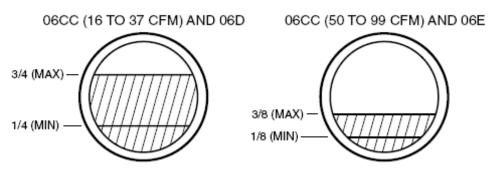

Feel free to contact Application Engineering at 800-GO-CARLYLE (800-462-2759) if you have any questions.