
DATE:

JULY 12, 1999

AUTHOR: PAUL TOLLAR

Carlyle Technical Bulletin 99T-8

05T/06T Oil Solenoid Sightglass Accessory



Introducing a new oil solenoid sightglass accessory of our 05T/06T screw compressors, available July 6, 1999.

The EF23ZZ025 accessory is installed at the oil inlet connection of these screw compressors. The solenoid portion is wired into the compressor s electronic control module that opens the solenoid when the compressor is energized and closes when the compressor is de-energized. The solenoid valve port is sized to avoid excessive pressure drops with the oil approved with this compressor. The addition of the sightglass offers a useful feature to help field personnel verify oil is flowing when required and not leaking through when the compressor is off.

This accessory has been fully tested and field qualified by Carlyle. It is also a UL approved device. The solenoid coils that are applied with this device are the same as those applied with our 06D/E unloaders, 05T/06T unloaders and VI valves:


EF19ZE120 EF19ZE240 120-1-50/60 208/240-1-50/60

EF19ZE024

24/1-50/60

The new control is shown in our 1999 price pages but with an incorrect EF12ZZ025 part number.

Please correct page 41 to show the correct EF23ZZ025 accessory part.

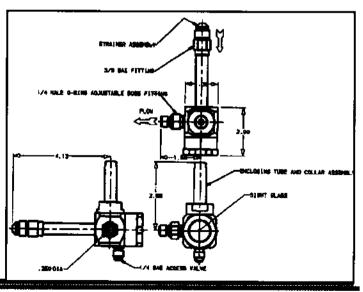

Carlyle Compressor Division

P O Box 4803

Syracuse, NY 13221

Phone: 315-432-6237

Fax: 315-432-3274